



DIGITAL PROTRACTOR

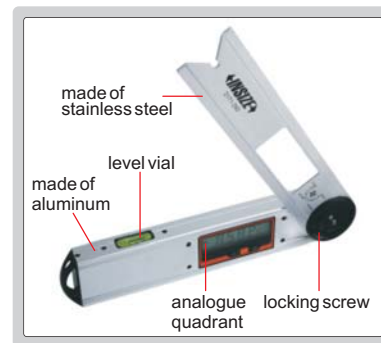

2171-250



- Buttons: ON/OFF, HOLD (keep the reading), ZERO, ABS (absolute and incremental measurement)
- Fix the locking screw at 4 positions for different measuring ranges: $0^{\circ}\sim 225^{\circ}$, $-225^{\circ}\sim 0^{\circ}$, $-45^{\circ}\sim 180^{\circ}$, $-180^{\circ}\sim 45^{\circ}$
- Remove the locking screw for 360° range
- With level vial
- Battery CR2032
- Automatic power off

Code	Size (L)	Range	Resolution	Accuracy
2171-250	250mm	$0\sim 360^{\circ}$	0.05°	$\pm 0.15^{\circ}$

